


Village of Glen Ellyn Sample - Site Management Plan for Demolition and Construction



(The sample plan below indicates general guidelines and standards to assist in the preparation of the required Site Management Plan for all demolitions)

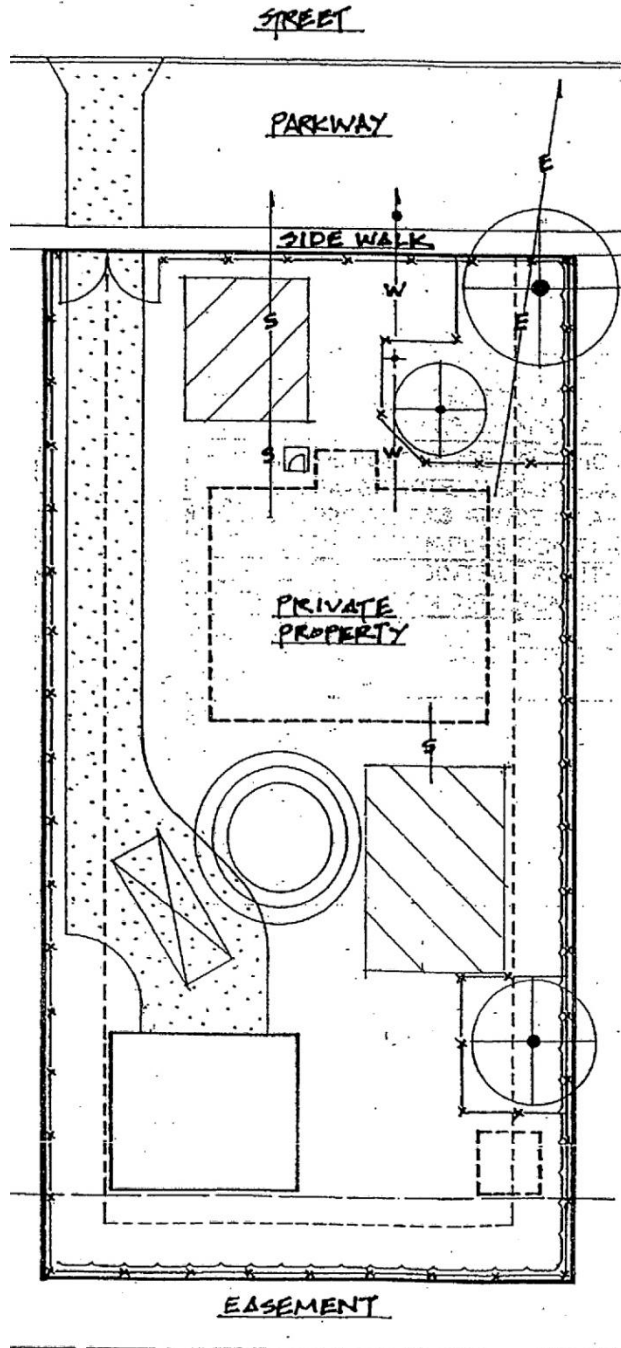

PLAN KEY	
	PROPERTY LINE WITH ALL EXISTING EASEMENTS WITHIN 20'
	EXISTING UTILITY LINES
	WATER AND B - BOX
	SANITARY SEWER
	NATURAL GAS
	ELECTRIC
	TEMPORARY CONSTRUCTION STORAGE AND ACTIVITY SETBACK LINE (10% LOT WIDTH OR 6:6' MIN)
	PERIMETER SAFETY FENCE AND GATE TO ENCLOSE SITE, AND TREE PROTECTION FENCE AS APPROVED ON TREE PROTECTION PLAN
	SILT FENCE AT ALL POINTS OF WATER RUNOFF FROM SITE
	EXISTING STRUCTURE(S) TO REMAIN
	EXISTING STRUCTURE(S) TO BE REMOVED
	EXISTING TREE TO BE PROTECTED AS APPROVED ON TREE PRESERVATION PLAN
	AREA OF SOIL STOCKPILE(S)
	AREA OF EXISTING SEPTIC FIELD
	AREA OF MATERIAL STOCKPILE(S)
	AREA OF VEHICLE AND EQUIPMENT ACCESS
	REFUSE CONTAINER/DUMPSTER
	PORTABLE TOILET (10' MINIMUM SETBACK TO ANY PROPERTY LINE)
	EXISTING WELL